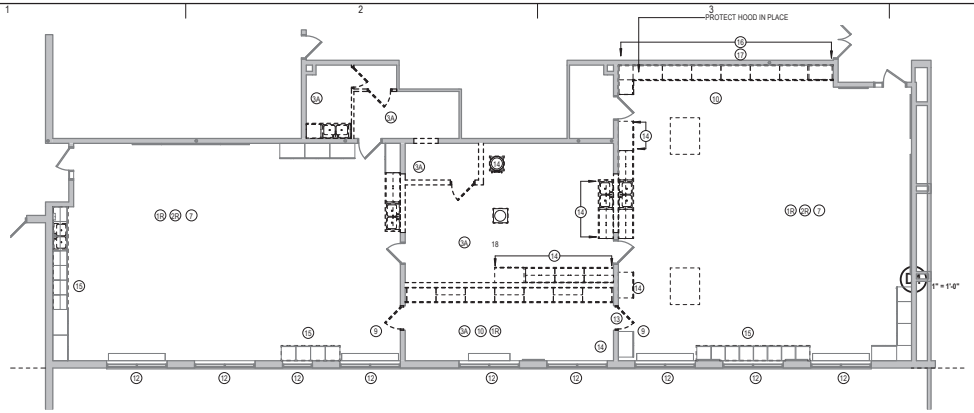

Existing design

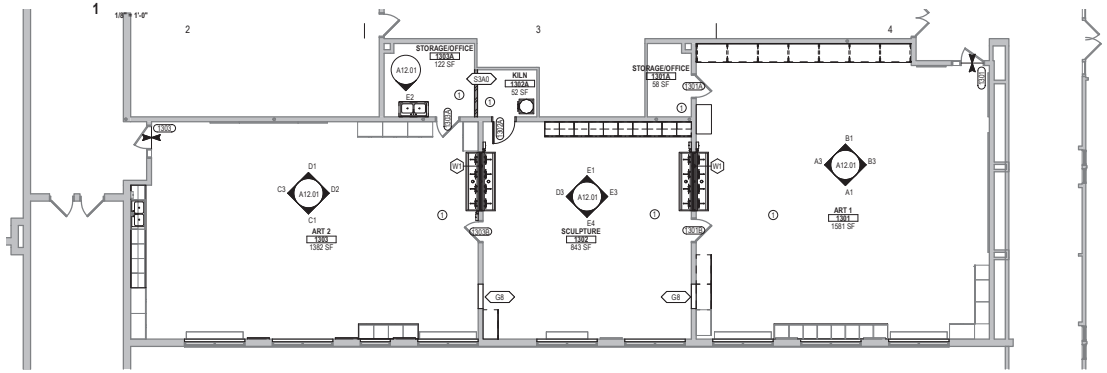

New Design

WALL TAG:



FIRE RATINGS
- 0 = FIRE RESISTANCE RATING: 0 HR
- X = SMOKE PARTITION
- Y = SMOKE BARRIER, FIRE RESISTANCE RATING: 1 HR
- 1 = FIRE RESISTANCE RATING: 1 HR
- 2 = FIRE RESISTANCE RATING: 2 HR
- 3 = FIRE RESISTANCE RATING: 3 HR
- 4 = FIRE RESISTANCE RATING: 4 HR

WALL TYPE GENERAL NOTES:

1. REFER TO DRAWING **A00.11** LIFE SAFETY PLANS FOR PARTITION FIRE/ SMOKE RATINGS.
2. PARTITION HEIGHT
   - A. FULL HEIGHT PARTITIONS SHALL EXTEND TO THE UNDERNEATH SIDE OF THE STRUCTURAL FLOOR OR ROOF DECK UNO.
   - B. PARTIAL HEIGHT PARTITIONS SHALL EXTEND A MINIMUM OF 8" ABOVE THE HIGHEST ADJACENT CEILING OR ONE FULL COURSE ABOVE IF CMU
   - C. SEE SHEET **A13.01** FOR TOP OF PARTITION DETAILS.
3. ALL INTERIOR METAL STUD PARTITIONS ARE TYPE **S3A0S** UNO. SEE SHEET **A10.02** FOR TYPICAL STUD CONSTRUCTION AT DOOR FRAMES.
4. REFER TO ROOM FINISH SCHEDULE FOR WALL FINISHES AND WALL BASE.
5. SUBSTITUTE THE FOLLOWING FOR GYPSUM BOARD WHERE SHOWN ON DRAWINGS OR NOTED IN THE ROOM FINISH SCHEDULE:
   - A. TILE BACKING BOARD AT LOCATIONS TO RECEIVE A TILE WALL FINISH
   - B. IMPACT RESISTANT GYP BD WHERE INDICATED
   - C. MOISTURE RESISTANT GYP BD WHERE INDICATED.
6. AT INTERSECTIONS OF DISSIMILAR PARTITION TYPES, THE HIGHEST RATED PARTITION IS TO RUN THROUGH THE INTERSECTION TO MAINTAIN ENCLOSURE AND CONTINUITY OF THE HIGHEST FIRE AND ACOUSTIC RATING. MAINTAIN CONTINUITY OF FIRE AND SOUND RATING OF RATED PARTITIONS AT INTERSECTIONS WITH COLUMN ENCLOSURES BY EXTENDING THE PARTITION AROUND THE COLUMN.
7. FILL STUD PARTITIONS WITH SOUND ATTENUATION BLANKETS WHERE INDICATED FOR THE PARTITION TYPE. STC RATINGS ARE MINIMUM ACOUSTICAL PERFORMANCE REQUIREMENTS. ACOUSTICAL TEST REFERENCES ARE GIVEN FOR REFERENCE ONLY. PROVIDE SOUND ATTENUATION BLANKET THICKNESS AS FOLLOWS: 3" FOR PARTITIONS WITH 3 5/8 ", 4" OR 6" STUDS.
8. PROVIDE 5/8" MINIMUM THICKNESS GYPSUM BOARD. REFER TO PROJECT MANUAL SECTION 09 29 00 GYPSUM BOARD AND RELATED DIVISION 9 SECTIONS.
9. MAINTAIN TOP OF WALL CLOSURES AT STEEL BEAMS AND JOIST CONNECTIONS. SEE SHEET **A13.01** FOR DETAIL.
10. SEAL PENETRATIONS THRU FULL HEIGHT WALLS. SEE SHEET AN.01 FOR DETAIL.
11. MAINTAIN TOP OF WALL CLOSURES AT STEEL BEAMS AND JOIST CONNECTIONS. SEE SHEET AN.01 FOR DETAIL.
12. PROVIDE CONTROL JOINTS NOT TO EXCEED THE SPACES INDICATED BELOW. OBTAIN APPROVAL OF LOCATIONS FROM THE ARCHITECT PRIOR TO CONSTRUCTION.

MATERIAL/EXPOSURE	MAX. SPACING	DETAIL ON SHEET
BRICK/INTERIOR	40' HORIZONTAL	AN.01
BRICK/EXTERIOR	24' HORIZONTAL	AN.01
CMU/INTERIOR	24' HORIZONTAL	AN.01
CMU/EXTERIOR	20' HORIZONTAL	AN.01
CMU/FOUNDATION	NONE	
INTERIOR GYP BD CEILING W/ PERIMETER RELIEF	50' ANY DIRECTION	AN.01
ALL OTHER INTERIOR OR EXTERIOR GYP BD WALLS OR CEILINGS	30' ANY DIRECTION	AN.01

KEYED FLOOR PLAN NOTES

1 CLEAN AND POLISH CONCRETE FLOOR

KEYED REFLECTED CEILING PLAN NOTES

CEILING TYPE KEY

4 2' x 2' APC SYSTEM

CEILING GENERAL NOTES

1. RETURN GYPSUM WALLBOARDS VERTICALLY WHERE CEILING HEIGHTS OFFSET.
2. PROVIDE CONTROL JOINTS (CJ) WHERE SHOWN IN GYPSUM BOARD AND RETURN VERTICALLY AT OFFSETS. SEE DRAWING A0.0. SPACE NOT GREATER THAN DISTANCES SHOWN IN FLOOR PLAN GENERAL NOTES.
3. CENTER CEILING GRID EACH WAY WITHIN ROOMS AND AREAS AS SHOWN HEREIN, UNO.
4. PAINT ALL EXPOSED STEEL, CONDUIT, DUCTWORK, PIPING ETC. IN ROOMS/ AREAS NOTED OR SCHEDULED TO RECEIVE PAINTED FINISHES.
5. PROVIDE SUPPORT WIRE AT EACH CEILING GRID MEMBER LOACATED ABOVE ALL CEILING MOUNTED PROJECTION SCREENS.
6. REFER TO A0.0 AND STRUCTURAL DRAWINGS FOR TOP OF WALL CONDITIONS.
7. (9'-0") DENOTES HEIGHT OF BOTTOM OF CEILING ABOVE FINISH FLOOR.
8. SEE SHEETS FIRE COD DRAWINGS FOR FIRE AND SMOKE BARRIERS.
9. SPRINKLER HEAD AND PIPING LOCATION SHOWN FOR ORGANIZATION CONCEPT AND DESIGN INTENT ONLY - COORDINATE AND VERIFY LAYOUT WITH SPECIFIED REQUIREMENTS.
10. CONDUITS FOR LIGHTING ARE TO BE CONCEALED ABOVE THE DECK.
11. NOT ALL CEILING DEVICES ARE SHOWN. SEE MECHANICAL AND ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
12. ALL CEILING DEVICES ARE TO BE CENTERED ON TILES, PANELS, OR SPACE UNLESS OTHERWISE INDICATED; ALIGN WITH ADJACENT DEVICES.

SCHEMATIC DESIGN

PRELIMINARY - NOT FOR CONSTRUCTION

HOOVER HIGH SCHOOL ART ROOM

RDG Planning & Design

ARCHITECT
RDG Planning & Design
700 Locust Street
Des Moines, Iowa
Phone: (515) 288-3141

CONSULTANT

CONSULTANT

4800 Aurora Ave, Des Moines, IA 50310

DM Schools

KEY PLAN

REV	DATE	DESCRIPTION

ISSUED: 05/01/2018

PROJECT NO: 3003.032.00

©2018 RDG Planning & Design
THESE DOCUMENTS ARE, AND SHALL REMAIN, THE PROPERTY OF RDG Planning & Design. ALL RIGHTS RESERVED. THE PLANS AND SPECIFICATIONS MAY NOT BE REPRODUCED IN ANY FORM BY ANY METHOD FOR ANY PURPOSE WHATSOEVER WITHOUT THE WRITTEN CONSENT OF RDG Planning & Design. THEY ARE NOT TO BE CHANGED OR COPIED IN ANY FORM OR MANNER WHATSOEVER, NOR ARE THEY TO BE ASSIGNED TO ANY THIRD PARTY, WITHOUT FIRST OBTAINING THE WRITTEN PERMISSION AND APPROPRIATE COMPENSATION TO RDG Planning & Design.

PREPARED BY RDG Planning & Design FOR THE HOOVER HIGH SCHOOL ART ROOM PROJECT. THEY ARE NOT SUITABLE FOR USE ON OTHER PROJECTS OR IN OTHER LOCATIONS WITHOUT THE EXPRESS WRITTEN APPROVAL AND PARTICIPATION OF RDG Planning & Design. REPRODUCTION IS PROHIBITED.

PRINTING MAY NOT REPRESENT ALL CHANGES THAT HAVE OCCURRED DURING BID OR CONSTRUCTION PHASES. CONSTRUCTION DOCUMENTS, ADDENDA AND CHANGE DOCUMENTS REMAIN THE OFFICIAL CONSTRUCTION DOCUMENTS.

FLOOR PLAN AND CEILING PLAN LEVEL

A01.01

12/6/2018 2:21:01 PM